

Features:

- Constant voltage
- 3 in 1 dimming function (0/1-10Vdc or 10v PWM signal or resistance)
- AC input: 200-240VAC
- Built-in active PFC function
- High efficiency up to 90%
- Protections: Short circuit/ Over current/ Over loading
- IP66 design for indoor and outdoor installation
- Suitable for LED lighting and moving signs
- 5 years warranty



IP66
SELV

Models

	ELED-200-12V	ELED-200-24V	ELED-200-48V
Output Specifications			
Output Voltage	12V	24V	48V
Voltage Tolerance		± 0.5%	
Output Current	16.67A	8.34A	4.17A
Rated Power		200W	
Input Specifications			
Input Voltage		200-240VAC	
Frequency Range		47-63Hz	
Inrush Current		51.60A (Twidth=450μs 230VAC)	
Full Load Efficiency (Typ.)	88%		89%
AC Current (Max.)		1.4A	
Leakage Current		<0.50mA	
Power Factor		PF>0.98/230VAC (Full Loading)	
Protection			
Short Circuit	Constant current mode, recovers automatically after fault condition is removed		
Over Loading		≤120%	
Over Current		≤1.2*Iout	
Over Temperature	100°C±10°C, Shut down o/p voltage, recovers automatically after temp. goes down.		
Environment			
Working Temperature	-40~+60°C (Refer to derating curve)		
Working Humidity	20-95% RH, non-condensing		
Storage Temperature, Humidity	-40~+80°C, 10-95% RH		

Environment

Temperature Coefficient	$\pm 0.03\%/^{\circ}\text{C}$ (0-50°C)
Vibration	10-500Hz 5G 12min./ 1 cycle, period for 72min. each along X, Y, Z axes


Safety & EMC

Safety standards	EN61347-1, EN61347-2-13
Withstand voltage	I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC
Isolation resistance	I/P-O/P I/P-FG O/P-FG:100M Ω /500VDC/25°C/70%RH
EMC Emission	Compliance to EN55015, EN61000-3-2 ($\geq 60\%$ load)
EMC Immunity	EN61000-4-2,3,4,5,6,11, EN61547, light industry Level Criteria A


Other Specifications

Weight	1.45 Kg
Size	256 x 78 x 47 mm
Packing	329 x 279 x 176 mm (10PCS/CTN)


Mechanical Specifications

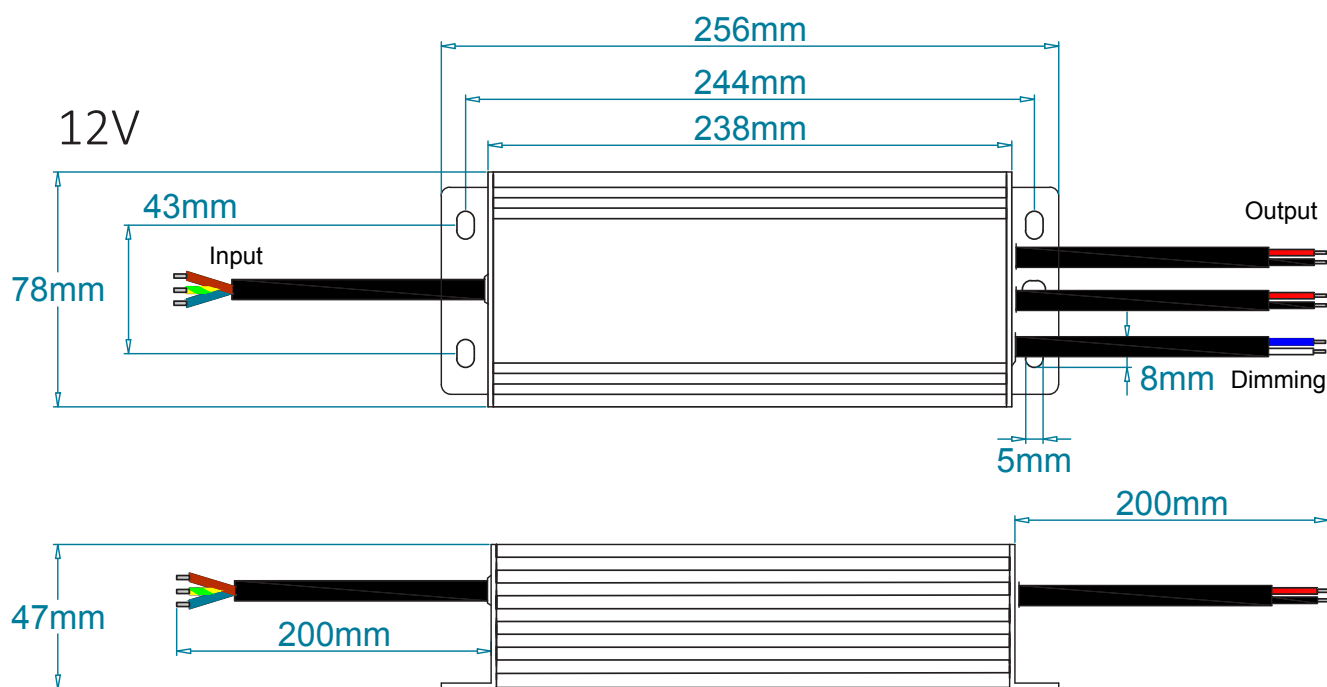



Mechanical Specifications

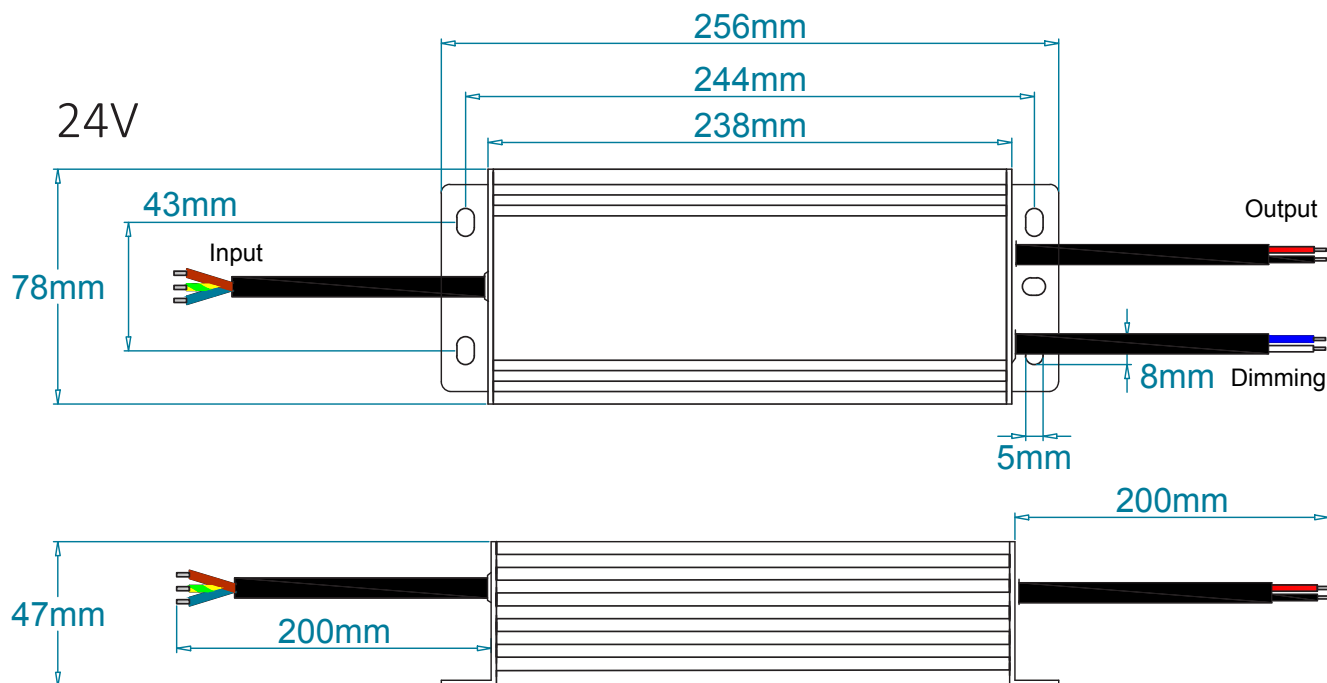

Derating Curve

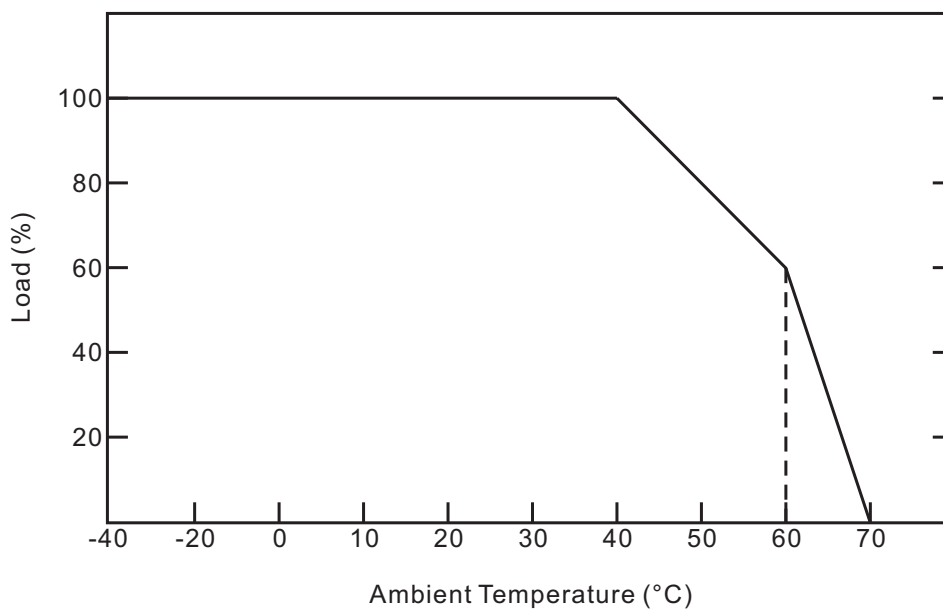

Connection Drawing

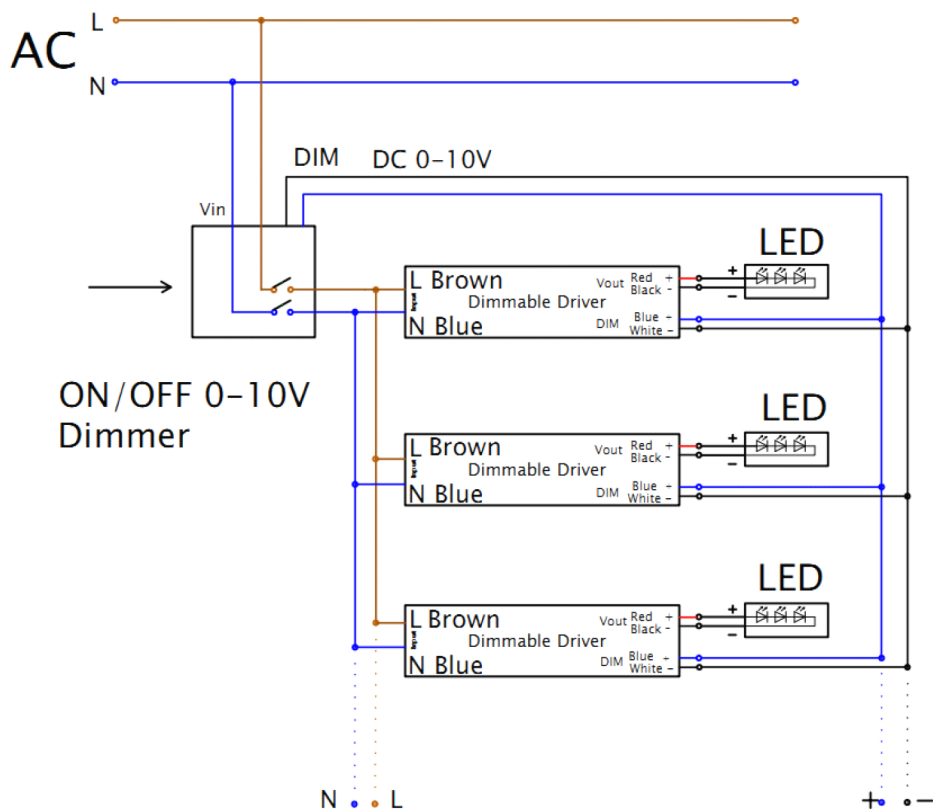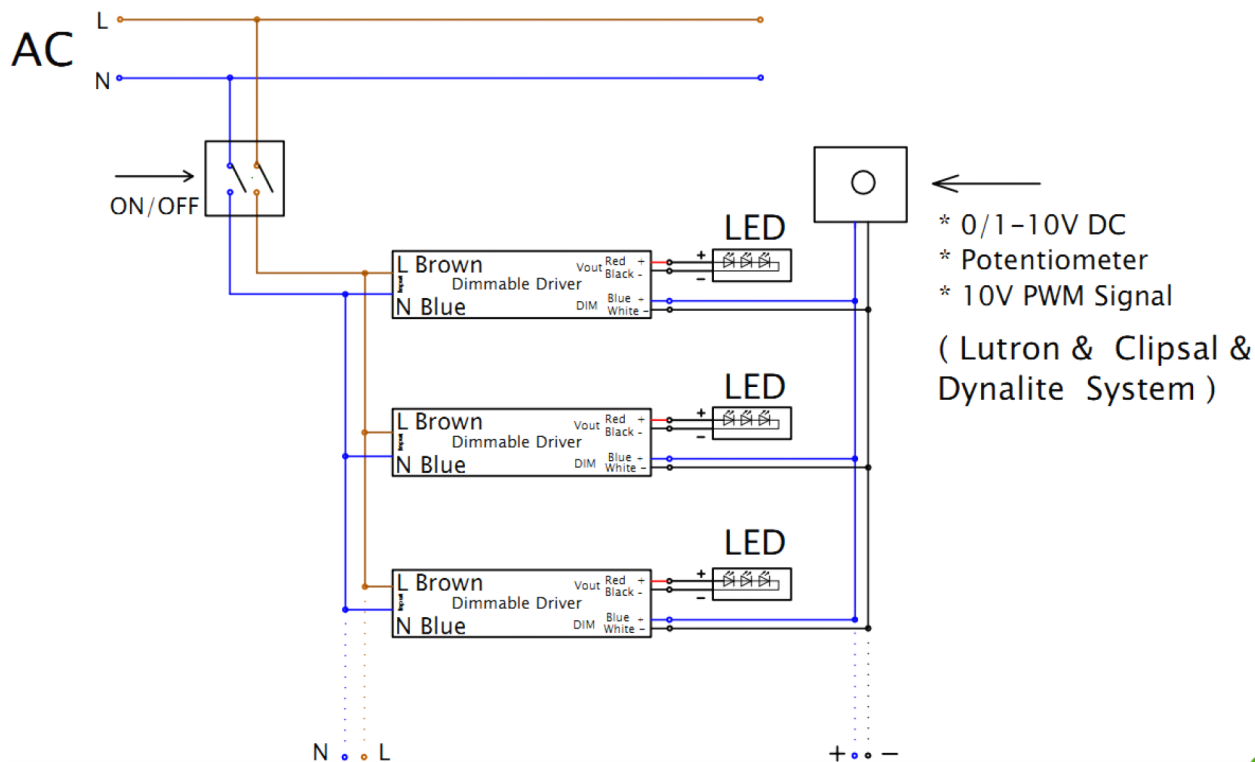

Dimming Operation

※Reference resistance value: (Typical)

Resistance value	Single driver	0Ω	10KΩ	20KΩ	30KΩ	40KΩ	50KΩ	60KΩ	70KΩ	80KΩ	90KΩ	100KΩ	OPEN
	Multiple drivers	0Ω/N	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	—
Percentage of luminous		0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%

※1-10/0-10V dimmable function :(Typical)

Dimming value	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of luminous	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%

※10V PWM signal: (Typical): Frequency range:100Hz-3KHZ

Duty value	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of luminous	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%